
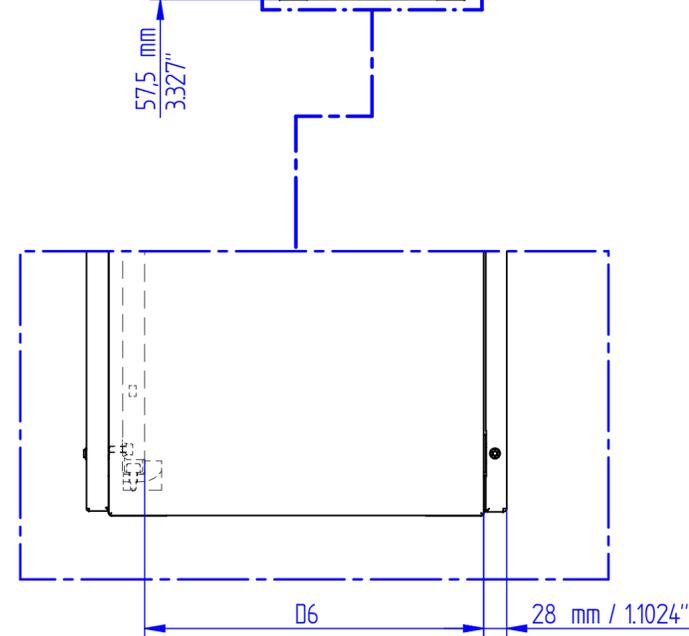
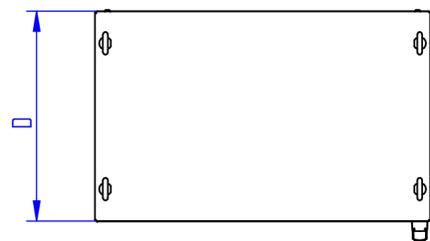
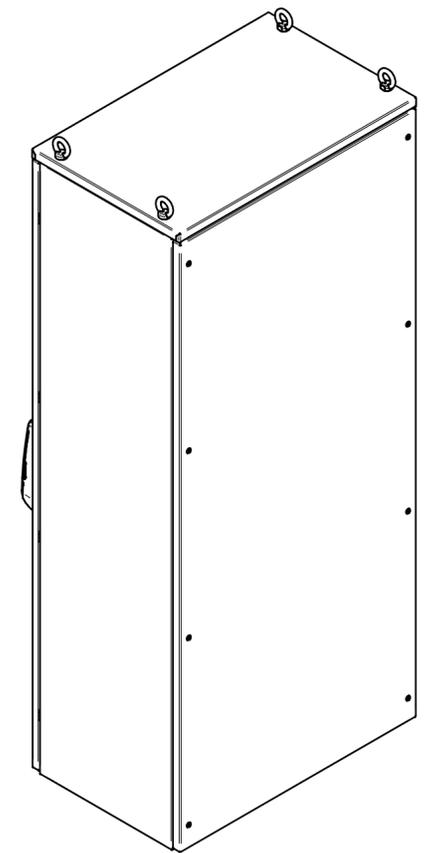
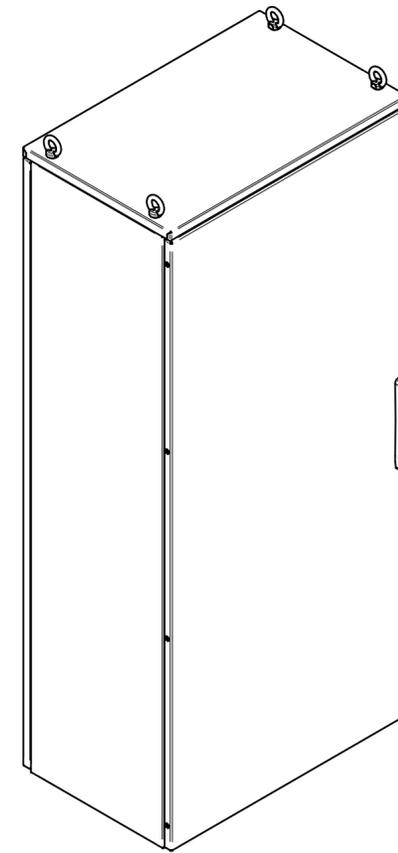
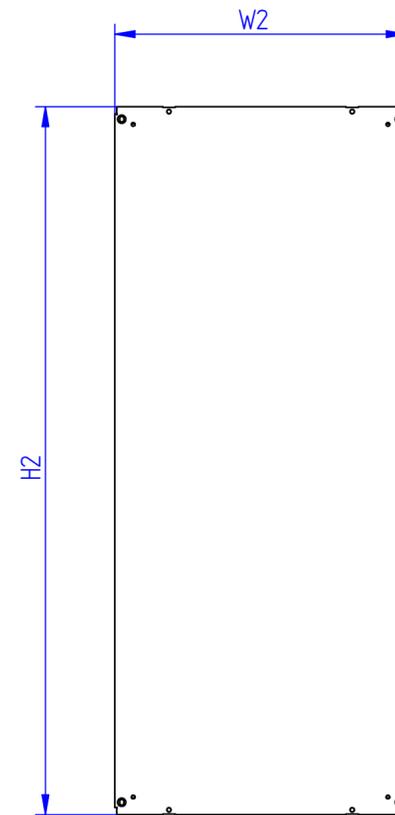
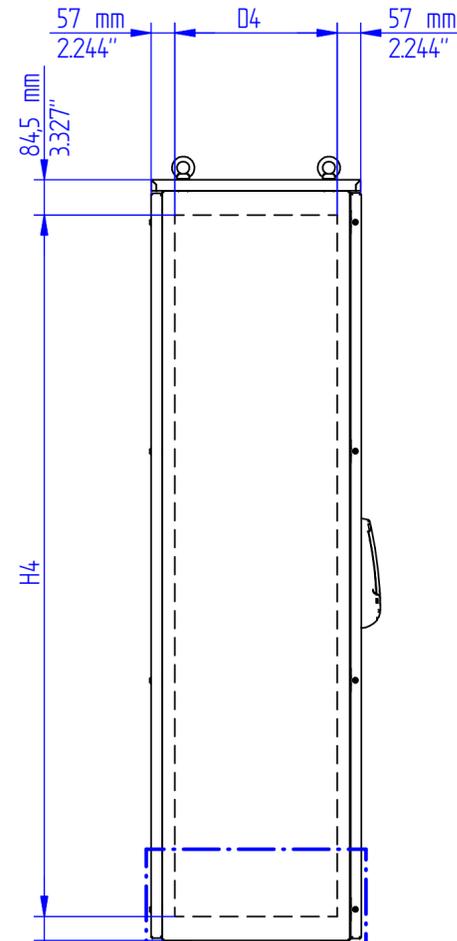
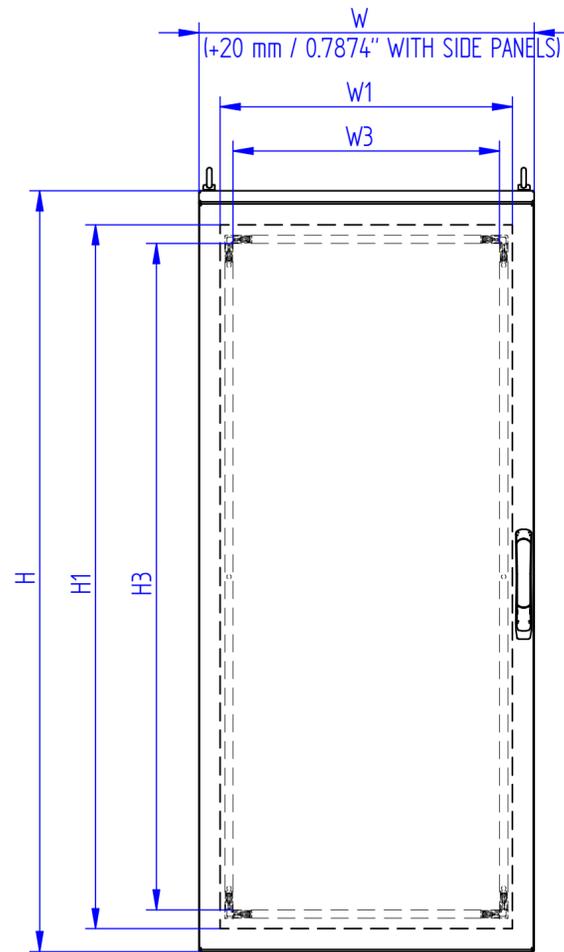


1 BLIND DOOR

ITEM CODE	NOMINAL DIMENSIONS			ACTUAL DIMENSIONS			USABLE DIMENSIONS OF FRONTAL ENTRY		MOUNTING PLATE		USABLE DIMENSIONS FOR DOOR CUTOUTS		USABLE DIMENSIONS FOR SIDE PANEL CUTOUTS		USABLE DIMENSIONS FOR CABLE ENTRY		FROM FRONTAL INSERTION PLATE TO DOOR
	W	H	D	W	H	D	W1	H1	W2	H2	W3	H3	H4	D4	W5	D5	D6
SCS6018040_N	600 / 23,62	1800 / 70,87	400 / 15,748	605 / 23,82	1827 / 71,93	403 / 15,866	504 / 19,843	1700 / 66,93	500 / 19,685	1700 / 66,93	440 / 17,323	1600 / 62,99	1685 / 66,34	290 / 11,417	366 / 14,41	210 / 8,268	307 / 12,087
SCS8016040_N	800 / 31,496	1600 / 62,99	400 / 15,748	805 / 31,69	1627 / 64,06	403 / 15,866	704 / 27,717	1500 / 59,06	700 / 27,56	1500 / 59,06	640 / 25,197	1400 / 55,12	1485 / 58,46	290 / 11,417	566 / 22,283	210 / 8,268	307 / 12,087
SCS8018040_N	800 / 31,496	1800 / 70,87	400 / 15,748	805 / 31,69	1827 / 71,93	403 / 15,866	704 / 27,717	1700 / 66,93	700 / 27,56	1700 / 66,93	640 / 25,197	1600 / 62,99	1685 / 66,34	290 / 11,417	566 / 22,283	210 / 8,268	307 / 12,087
SCS8018050_N	800 / 31,496	1800 / 70,87	500 / 19,685	805 / 31,69	1827 / 71,93	503 / 19,803	704 / 27,717	1700 / 66,93	700 / 27,56	1700 / 66,93	640 / 25,197	1600 / 62,99	1685 / 66,34	390 / 15,354	566 / 22,283	310 / 12,205	407 / 16,024
SCS8020040_N	800 / 31,496	2000 / 78,74	400 / 15,748	805 / 31,69	2027 / 79,8	403 / 15,866	704 / 27,717	1900 / 74,8	700 / 27,56	1900 / 74,8	640 / 25,197	1800 / 70,87	1885 / 74,21	290 / 11,417	566 / 22,283	210 / 8,268	307 / 12,087
SCS8020050_N	800 / 31,496	2000 / 78,74	500 / 19,685	805 / 31,69	2027 / 79,8	503 / 19,803	704 / 27,717	1900 / 74,8	700 / 27,56	1900 / 74,8	640 / 25,197	1800 / 70,87	1885 / 74,21	390 / 15,354	566 / 22,283	310 / 12,205	307 / 12,087
SCS10018040_N	1000 / 39,37	1800 / 70,87	400 / 15,748	1005 / 39,57	1827 / 71,93	403 / 15,866	904 / 35,59	1700 / 66,93	900 / 35,43	1700 / 66,93	840 / 33,07	1600 / 62,99	1685 / 66,34	290 / 11,417	766 / 30,16	210 / 8,268	307 / 12,087
SCS10018050_N	1000 / 39,37	1800 / 70,87	500 / 19,685	1005 / 39,57	1827 / 71,93	503 / 19,803	904 / 35,59	1700 / 66,93	900 / 35,43	1700 / 66,93	840 / 33,07	1600 / 62,99	1685 / 66,34	390 / 15,354	766 / 30,16	310 / 12,205	407 / 16,024
SCS10020050_N	1000 / 39,37	2000 / 78,74	500 / 19,685	1005 / 39,57	2027 / 79,8	503 / 19,803	904 / 35,59	1900 / 74,8	900 / 35,43	1900 / 74,8	840 / 33,07	1800 / 70,87	1885 / 74,21	390 / 15,354	766 / 30,16	310 / 12,205	407 / 16,024

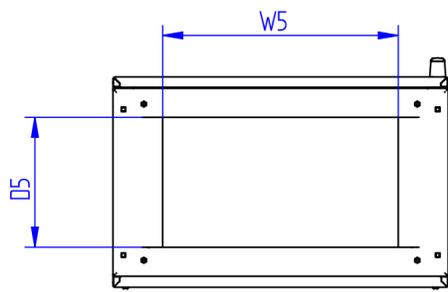

Description		<p><b>GENERAL SCHEME SCS CABINETS WITH ONE BLIND DOOR</b></p>		
<p>Technical Datasheet Code</p> <p><b>SCTEC.SCS.1PC.EN 00</b></p>				
Issue	Date 08/01/2025	<p>SHEET 1 OF 1</p>		<p>MPGAMMA</p> <p>WORLDWIDE</p>

MEDIUM-GRADE TOLERANCES AS PER STANDARD : ISO2768-m