

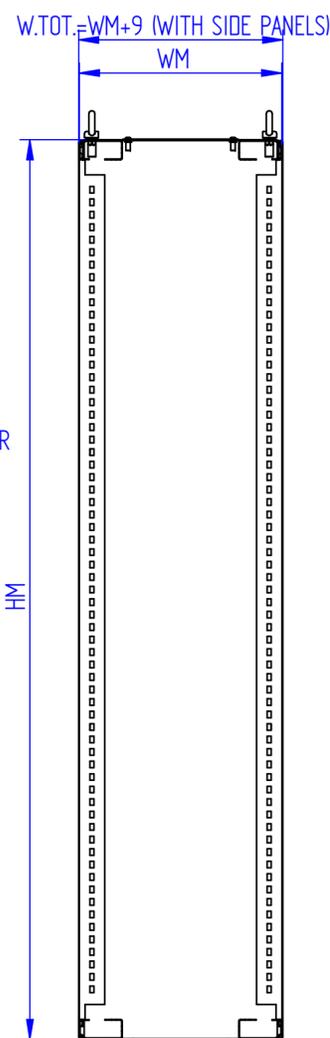

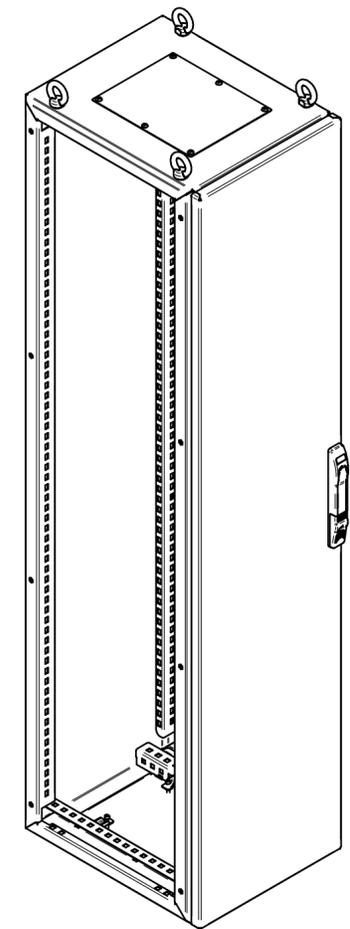


W2 x H2  
USABLE FRONT DOOR  
PERFORATION AREA

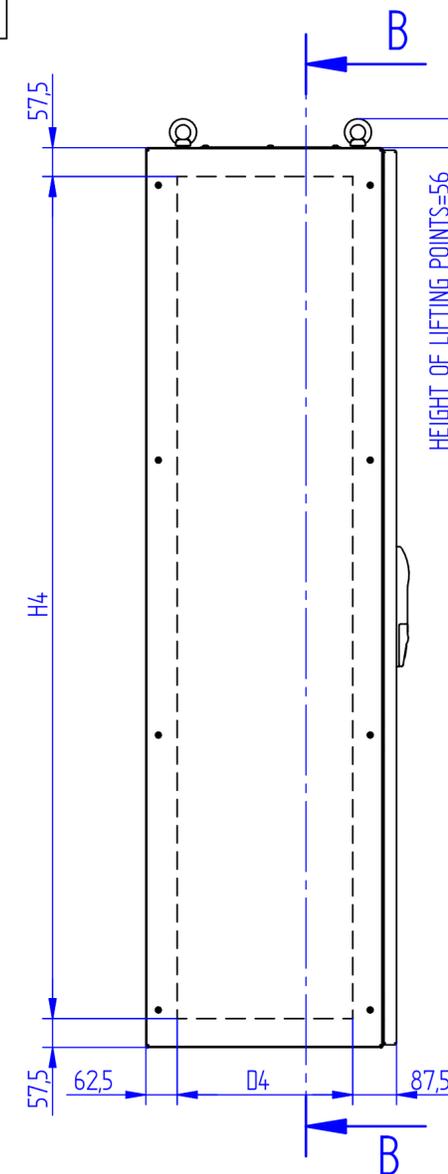


SECTION B-B


FRONT VIEW WITHOUT DOOR

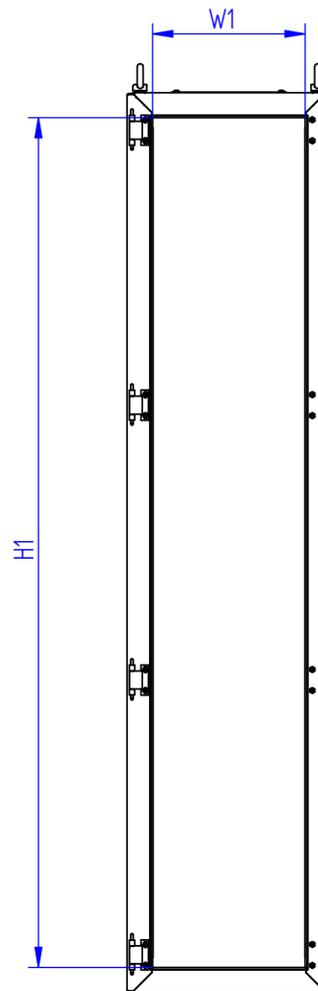

TOP CLOSING  
FLANGE



SECTION A-A



ITEM CODE	NOMINAL DIMENSIONS			N° DOORS	MAX DIMENSIONS		USABLE DIMENSIONS OF FRONTAL ENTRY		USABLE DIMENSIONS FOR DOOR CUTOUTS		FRONTAL DOOR DIMENSIONS		USABLE DIMENSIONS FOR SIDE PANEL CUTOUTS		BOTTOM FLANGEDRILLING DIMENSION		TOP FLANGEDRILLING DIMENSION	
	W	H	D		WM	HM	W1	H1	W2	H2	W3	H3	D4	H4	W5	D5	W6	D6
UNIT	mm/ inch	mm/ inch	mm/ inch		mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch	mm/ inch
SRCM4018040_N	400/ 15.748	1800/ 70.87	400/ 15.748	1	405/ 15.945	1800/ 70.87	304/ 11.969	1700/ 66.93	240/ 9.449	1600/ 62.99	402/ 15.827	1790/ 70.47	250/ 9.843	1685/ 66.34	190/ 7.48	210/ 8.268	190/ 7.48	140/ 5.512
SRCM4018050_N	400/ 15.748	1800/ 70.87	500/ 19.685	1	605/ 23.82	1800/ 70.87	304/ 11.969	1700/ 66.93	240/ 9.449	1600/ 62.99	402/ 15.827	1790/ 70.47	350/ 13.78	1685/ 66.34	190/ 7.48	310/ 8.268	190/ 7.48	240/ 9.449
SRCM4018060_N	400/ 15.748	1800/ 70.87	600/ 23.62	1	805/ 31.69	1800/ 70.87	304/ 11.969	1700/ 66.93	240/ 9.449	1600/ 62.99	402/ 15.827	1790/ 70.47	450/ 17.717	1685/ 66.34	190/ 7.48	410/ 16.142	190/ 7.48	340/ 13.386
SRCM4020050_N	400/ 15.748	2000/ 78.74	500/ 19.685	1	805/ 31.69	2000/ 78.74	304/ 11.969	1900/ 74.8	240/ 9.449	1600/ 62.99	402/ 15.827	1990/ 78.35	350/ 13.78	1885/ 74.21	190/ 7.48	310/ 8.268	190/ 7.48	240/ 9.449
SRCM4020060_N	400/ 15.748	2000/ 78.74	600/ 23.62	1	805/ 31.69	2000/ 78.74	304/ 11.969	1900/ 74.8	240/ 9.449	1600/ 62.99	402/ 15.827	1990/ 78.35	450/ 17.717	1885/ 74.21	190/ 7.48	410/ 16.142	190/ 7.48	340/ 13.386

Description		<b>GENERAL SCHEME CABLE RISE SPEED</b>		
Technical Date Sheet Code <b>SCTEC.SPEED.RSL.EN</b>		Issue	Date <b>01/10/2025</b>	
		00	SHEET 1 OF 1	<b>MPGAMMA</b> WORLDWIDE